



25L6, 25L6-GT/G

BEAM POWER AMPLIFIER

Heater	Coated Unipotential Cathode	
Voltage	25	a-c or d-c volts
Current	0.3	amp.
	25L6	25L6-GT/G
Direct Interelectrode Cap.	▲	▲▲
Grid to Plate	0.3	0.8 μmf
Input	16.0	15 μmf
Output	13.5	10 μmf
Maximum Overall Length	3-1/4"	3-5/16"
Maximum Seated Height	2-11/16"	2-3/4"
Maximum Diameter	1-5/16"	1-5/16"
Bulb	Metal Shell, MT-8	T-9
Base	{ Small Wafer Octal 7-Pin	{ Intermed. Sh. Octal 7-Pin
Basing Designation	7AC	G-7AC
Pin 1 { 25L6, Shell 25L6-GT/G, no con.		Pin 5 - Grid
Pin 2 - Heater		Pin 7 - Heater
Pin 3 - Plate		Pin 8 - Cathode, Grid #3
Pin 4 - Screen		
Mounting Position		Any
		
BOTTOM VIEW		
Maximum Ratings Are Design-Center Values		
AMPLIFIER		
Plate Voltage	200 max.	volts
Screen Voltage	117 max.	volts
Plate Dissipation	10 max.	watts
Screen Dissipation	1.25 max.	watts
Typical Operation and Characteristics - Class A ₁ Amplifier:		
Plate Voltage	100	200 volts
Screen Voltage	110	110 volts
Grid Voltage *	-7.5	-8 volts
Peak A-F Grid Voltage	7.5	8 volts
Zero-Sig. Plate Cur.	49	50 ma.
Max.-Sig. Plate Cur.	50	55 ma.
Zero-Sig. Screen Cur.	4	2 approx. ma.
Max. Sig. Screen Cur.	11	7 approx. ma.
Plate Resistance	13000	30000 approx. ohms
Transconductance	9000	9500 μmhos
Load Resistance	2000	3000 ohms
Total Harmonic Dist.	10	10 %
Max.-Sig. Power Output	2.1	4.3 watts
■ In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible. ▲ with shell connected to cathode. Values are approximate. ▲▲ with no external shield. Values are approximate. * The type of input coupling used should not introduce too much resistance in the grid circuit. Transformer- or impedance-coupled devices are recommended. When the grid circuit has a resistance not higher than 0.1 megohm, fixed bias may be used; for higher values, cathode bias is required. With cathode bias, the grid circuit may have a resistance not to exceed 0.5 megohm.		
Curves under Type 50L6-GT apply to the 25L6 and 25L6-GT/G.		
← Indicates a change.		

Mar. 20, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


DATA

25L6



25L6

AVERAGE PLATE CHARACTERISTICS TRIODE CONNECTION

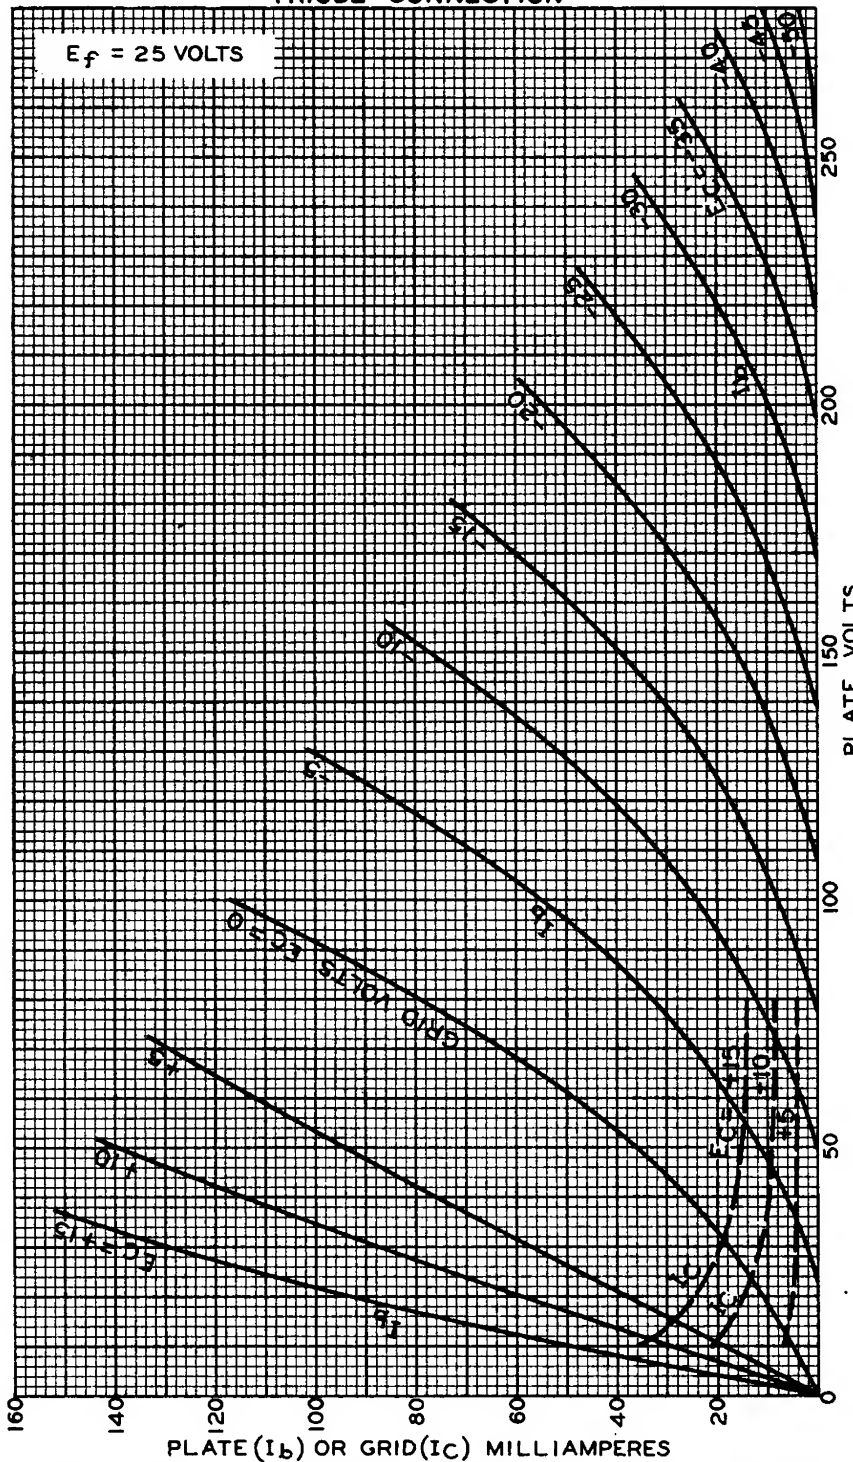

AUG. 22, 1941

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA HARRISON, NEW JERSEY

92C-6316